
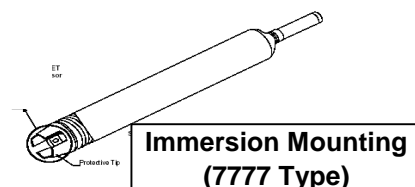



DL2000 Electrode Mountings for Meredian II pH Electrodes with DL421

Model Selection Guide with Price Data

Model Selection Guide
51-52-16-76 Issue 4

Honeywell Proprietary

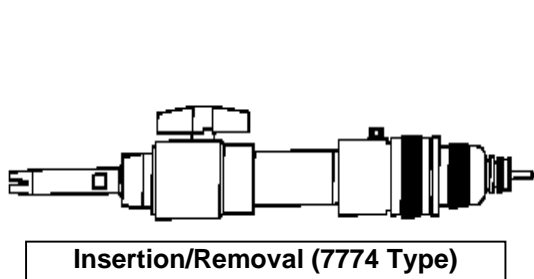

Instructions

- Select the desired key number. The arrow to the right marks the selection available.
 - Make the desired selections from Table I using the column below the proper arrow. A dot (•) denotes availability. No (•) dot denotes not available.
- Key Number** I II
- -

List Price equals the sum of all prices for all selections made.

Key Number - Mounting/Electrode Only ¹ (Specify DL421 separately)	Selection	Availability
pH Electrode/Mountings	Electrode/Mountings for Meredian II pH version of DL421	DL2 ↓
		<input type="text"/>

TABLE I - Mounting Type, Construction, Temp Range, Cable Length ²

Mounting Type	Construction	Temp. Range	Cable Length		
Insertion/Removal (7774)	CPVC	0 to 80 ° C	12 ft. (3,7 m)	740	•
		20 to 110 ° C	12 ft. (3,7 m)	741	•
		0 to 80 ° C	20 ft. (6,1 m)	742	•
		20 to 110 ° C	20 ft. (6,1 m)	743	•
In-Line (7777)	Integral Mounting	0 to 80 ° C	None	770	•
		20 to 110 ° C	None	771	•
	Remote Mounting	0 to 80 ° C	12 ft. (3,7 m)	772	•
		20 to 110 ° C	12 ft. (3,7 m)	773	•
		0 to 80 ° C	20 ft. (6,1 m)	774	•
		20 to 110 ° C	20 ft. (6,1 m)	775	•
Immersion (7777)	Remote Mounting	0 to 80 ° C	12 ft. (3,7 m)	776	•
		20 to 110 ° C	12 ft. (3,7 m)	777	•
		0 to 80 ° C	20 ft. (6,1 m)	778	•
		20 to 110 ° C	20 ft. (6,1 m)	779	•

TABLE II - Options

TABLE II - Options		Selection	Availability	
Tagging	None	00 __	•	
	Linen Customer I.D. Tag - 3 lines w/22 characters/line	LT __	•	
	Stainless Steel Customer I.D. Tag 3 lines w/22 characters/line	SS __	•	
Calibration Certificate	None	__00	•	
	Calibration certificate to be supplied w/shipment	_ _10	•	

- Notes:**
1. DL421 electronics module must be specified separately
 2. Replacement electrodes for these mountings can be ordered as follows:

Table I Selection	Mounting Type	Replacement Electrode P/N
740	Insertion/Removal - CPVC (7774)	51451326-001
741	Insertion/Removal - CPVC (7774)	51451325-001
742	Insertion/Removal - CPVC (7774)	51451326-003
743	Insertion/Removal - CPVC (7774)	51251325-003
770	In-Line Integral Mounting (7777)	51500658-002
771	In-Line Integral Mounting (7777)	51500658-001
772	In-Line Remote Mounting (7777)	51451326-002
773	In-Line Remote Mounting (7777)	51451325-002
774	In-Line Remote Mounting (7777)	51451326-004
775	In-Line Remote Mounting (7777)	51451325-004
776	Immersion Remote Mounting (7777)	51451326-001
777	Immersion Remote Mounting (7777)	51451325-001
778	Immersion Remote Mounting (7777)	51451326-003
779	Immersion Remote Mounting (7777)	51451325-003