

Parallel grippers DHPS



Parallel grippers DHPS

Key features

FESTO

At a glance

General information

- Resilient and precise T-slot guide of the gripper jaws
- Oval piston for high gripping forces
- High gripping forces with compact dimensions
- Gripper jaw centring options
- Max. repetition accuracy
- Gripping force retention
- Internal fixed flow control
- Wide range of options for mounting on drive units


- Sensor technology:
 - Adaptable position sensor for the small grippers
 - Integratable proximity sensors for the medium and large grippers

Flexible range of applications


- Can be used as a double-acting and single-acting gripper
- Compression spring for supplementary or retaining gripping forces
- Suitable for external and internal gripping

The technology in detail

Gripper closed



Gripper open

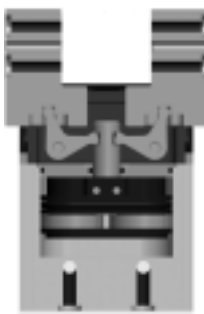

- 1 Gripper jaw
- 2 Reversing lever
- 3 Piston with magnet

-  - Note

Gripper selection
sizing software

→ www.festo.com

Position sensing/force control

With position transmitter SMAT-8M, SDAT



Analogue positional feedback possible

- Analogue output
 - 0 ... 10 V
 - 4 ... 20 mA

With proportional pressure regulator VPPM



Infinite adjustment of the gripping force possible

- Setpoint input
 - 0 ... 10 V
 - 4 ... 20 mA

With proximity sensor SMT-8G/-10G



Multiple positions can be sensed:


- Open
- Closed
- Workpiece gripped

Parallel grippers DHPS

Key features



Supply ports

At the side




Mounting options

At the side

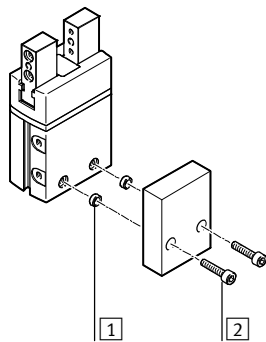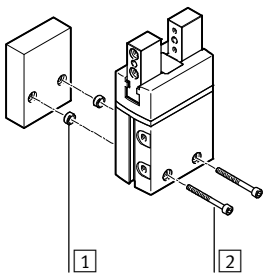


From underneath

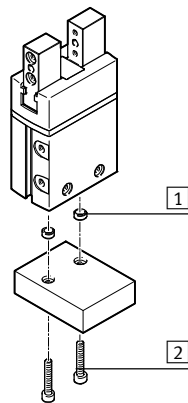

- 1 Centring sleeves
- 2 Mounting screws


Mounting options for external gripper fingers

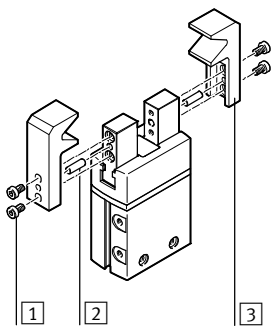


- 1 Mounting screws
- 2 Centring pins
- 3 Gripper fingers

Note


These grippers are not designed for the following or similar sample applications:



- Welding spatter

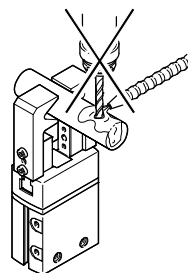

- Machining
- Aggressive media

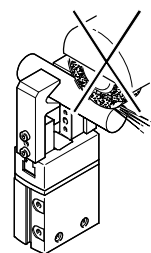


- Grinding dust

Parallel grippers DHPS


Peripherals overview

Peripherals overview


DHPS-6

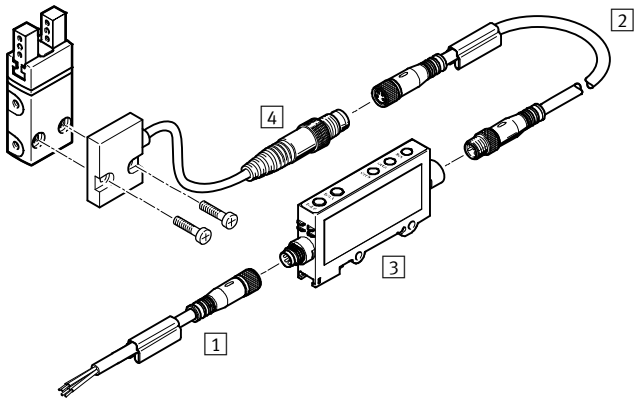


DHPS-10 ... 35

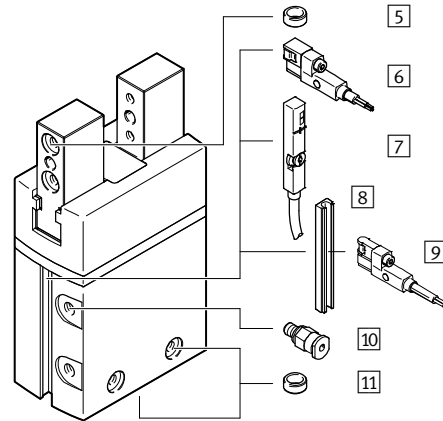

System product for handling and assembly technology

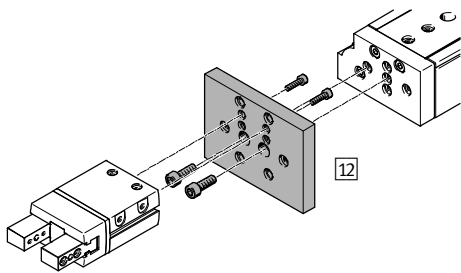

Proportional pressure regulator VPPM



Parallel grippers DHPS

Peripherals overview

Accessories				
	Type	Size	Description	→ Page/Internet
1	Connecting cable NEBU	6	<ul style="list-style-type: none"> • Connection between signal converter and controller 	22
2	Connecting cable NEBU	6	<ul style="list-style-type: none"> • Connection between position sensor and signal converter 	22
3	Signal converter SVE4	6	<ul style="list-style-type: none"> • For evaluating signals for position sensor SMH-S1 	22
4	Position sensor SMH-S1	6	<ul style="list-style-type: none"> • Adaptable and integratable sensor technology, for sensing the piston position 	22
5	Centring sleeve ZBH	6 ... 35	<ul style="list-style-type: none"> • For centring the gripper fingers on the gripper jaws • The delivery scope of the gripper for size 10 and above includes 4 centring sleeves 	21
6	Proximity sensor SMT-8G	10 ... 35	<ul style="list-style-type: none"> • For sensing the piston position • Proximity sensor does not project past the housing at the bottom 	23
7	Position transmitter SMAT-8M	10 ... 35	<ul style="list-style-type: none"> • Continuously senses the position of the piston. Has an analogue output with an output signal in proportion to the piston position. 	23
	Position transmitter SDAT	35		
8	Bondable sensor rail HGP-SL	10 ... 35	<ul style="list-style-type: none"> • Enables the use of proximity sensors SME/SMT-10 	21
9	Proximity sensor SMT-10G	10 ... 35	<ul style="list-style-type: none"> • For sensing the piston position • Proximity sensor does not project past the housing at the bottom • With sensor rail HGP-SL10-... 	23
10	Push-in fitting QS	6 ... 35	<ul style="list-style-type: none"> • For connecting compressed air tubing with standard O.D. 	qs
11	Centring sleeve ZBH	6 ... 35	<ul style="list-style-type: none"> • For centring the gripper when mounting • The scope of delivery of the gripper includes 2 centring sleeves 	21
12	Adapter kit DHAA, HMSV, HAPG, HAPS, HMVA	6 ... 35	<ul style="list-style-type: none"> • Connecting plate between drive and gripper 	16
13	Proportional pressure regulator VPPM	6 ... 35	<ul style="list-style-type: none"> • For infinite adjustment of the gripping force 	vppm

Parallel grippers DHPS


Type codes

		DHPS	-	16	-	A	-	
Type								
DHPS	Parallel gripper							
Size								
Position sensing								
A	Via proximity sensor							
Gripping force retention								
NO	Opening							
NC	Closing							

Parallel grippers DHPS

Technical data

Function
Double-acting
DHPS-...-A



Size
6 ... 35 mm

Total stroke
4 ... 25 mm

www.festo.com

Function – Variants
Single-acting or
with gripping force retention ...
... opening DHPS-...-NO



... closing DHPS-...-NC



General technical data		6	10	16	20	25	35
Design		Lever Forced motion sequence					
Mode of operation		Double-acting					
Gripper function		Parallel					
Guide		Plain-bearing guide					
Gripping force retention		–	NO, NC	NO, NC	NO, NC	NO, NC	NO, NC
Number of gripper jaws		2					
Max. load per external gripper finger ¹⁾	[g]	10	60	150	250	350	450
Stroke per gripper jaw	[mm]	2	3	5	6.5	7.5	12.5
Pneumatic connection		M3	M3	M3	M5	G1/8	G1/8
Repetition accuracy ²⁾	[mm]	≤ 0.02					
Max. interchangeability	[mm]	± ±0.2					
Max. operating frequency	[Hz]	4			3		2
Rotational symmetry	[mm]	< Ø 0.2					
Position sensing		Via position sensor		Via proximity sensor, position transmitter			
Type of mounting		Via through-hole and centring sleeve Via female thread and centring sleeve					
Mounting position		Any					

1) Valid for unthrottled operation

2) End-position drift under constant conditions of use with 100 consecutive strokes in the direction of movement of the gripper jaws

Operating and environmental conditions		6	10	16	20	25	35
Min. operating pressure							
DHPS-...-A	[bar]	2					
DHPS-...-A-N	[bar]	–	4				
Max. operating pressure	[bar]	8					
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:4:4]					
Note on operating/pilot medium		Operation with lubricated medium possible (in which case lubricated operation will always be required)					
Ambient temperature ¹⁾	[°C]	+5 ... +60					
Corrosion resistance class CRC ²⁾		1					

1) Note operating range of proximity sensors

2) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. For dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Parallel grippers DHPS


Technical data

FESTO

Weight [g]						
Size	6	10	16	20	25	35
DHPS-...-A	19	67	184	380	700	1285
DHPS-...-A-N	-	68	188	387	713	1345


Materials

Sectional view

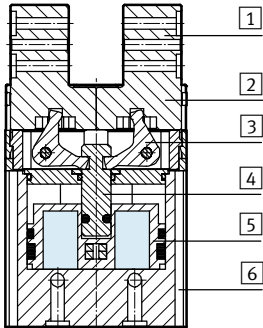


Parallel gripper		
1	Gripper jaw	High-alloy stainless steel
2	Cover cap	Polyamide
3	Reversing lever	Hardened sintered steel
4	Piston rod	Tempered steel
5	Piston	Polyacetal
6	Housing	Hard anodised wrought aluminium alloy
-	Seals	Nitrile rubber
-	Note on materials	Free of copper and PTFE RoHS-compliant

Gripping force [N] at 6 bar

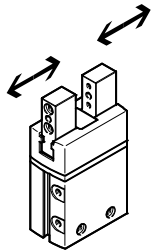

Size	6	10	16	20	25	35	
Gripping force per gripper jaw							
DHPS-...-A	Opening	15	39	105	162	249	483
	Closing	13.5	34.5	96	147	228	450
Total gripping force							
DHPS-...-A	Opening	30	80	210	320	500	970
	Closing	25	70	190	290	450	910

Characteristic load values at the gripper jaws

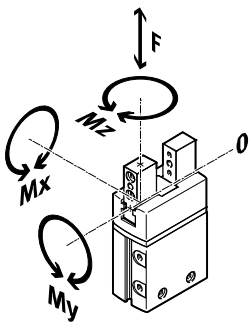

The indicated permissible forces and torques apply to a single gripper jaw. They include the lever arm, additional applied loads due to the workpiece or external gripper fingers and

acceleration forces occurring during movement.


The zero coordinate line (gripper jaw guide) must be taken into consideration for the calculation of torques.

Size	6	10	16	20	25	35	
Max. permissible force F_z	[N]	10	60	150	250	350	450
Max. permissible torque M_x	[Nm]	0.5	3	8	14	30	50
Max. permissible torque M_y	[Nm]	0.5	3	8	14	30	50
Max. permissible torque M_z	[Nm]	0.5	3	8	14	30	50

Parallel grippers DHPS

Technical data


Mass moment of inertia [kgm²x10⁻⁴]



Mass moment of inertia of the parallel gripper in relation to the central axis, without external gripper fingers, without load.

Size	6	10	16	20	25	35
DHPS-...-A	0.01	0.08	0.47	1.49	3.83	12.70
DHPS-...-A-NO	-	0.08	0.47	1.52	3.92	12.83
DHPS-...-A-NC	-	0.08	0.47	1.49	3.84	12.73

Gripper jaw backlash





The plain-bearing guide used in the grippers means that there is backlash between the gripper jaws and the housing. The values entered in the table for the backlash were calculated in accordance with the traditional accumulative tolerance method.

Size	6	10	16	20	25	35
Max. gripper jaw backlash Sz	[mm]	≤D.02				
Max. gripper jaw angular backlash ax, ay	[°]	≤I	≤D.5			

Opening and closing times [ms] at 6 bar

Without external gripper fingers

With external gripper fingers



The indicated opening and closing times [ms] were measured at room temperature at an operating pressure of 6 bar with horizontally mounted grippers without additional gripper

fingers. The grippers must be throttled for greater loads [g]. Opening and closing times must then be adjusted accordingly.


Size		6	10	16	20	25	35
Without external gripper fingers							
DHPS-...-A	Opening	8	21	33	59	48	95
	Closing	17	28	41	87	63	123
DHPS-...-A-NO	Opening	-	19	32	58	45	88
	Closing	-	30	50	97	78	151
DHPS-...-A-NC	Opening	-	58	48	72	68	131
	Closing	-	24	37	62	52	99
With external gripper fingers (as a function of the load per gripper finger)							
DHPS-...	20 g	50	-	-	-	-	-
	100 g	-	50	-	-	-	-
	125 g	-	100	-	-	-	-
	150 g	-	200	-	-	-	-
	200 g	-	-	100	-	-	-
	250 g	-	-	200	-	-	-
	300 g	-	-	300	100	-	-
	350 g	-	-	-	200	-	-
	400 g	-	-	-	300	100	-
	500 g	-	-	-	-	200	-
600 g	-	-	-	-	300	200	
750 g	-	-	-	-	-	300	

Parallel grippers DHPS

Technical data

Gripping force F_H per gripper jaw as a function of operating pressure and lever arm x

The gripping forces as a function of operating pressure and lever arm can be determined from the following graphs.




Note
Gripper selection
sizing software
→ www.festo.com


- 2 bar
- - - 4 bar
- · - 6 bar
- · · 8 bar

External gripping (closing)


DHPS-6

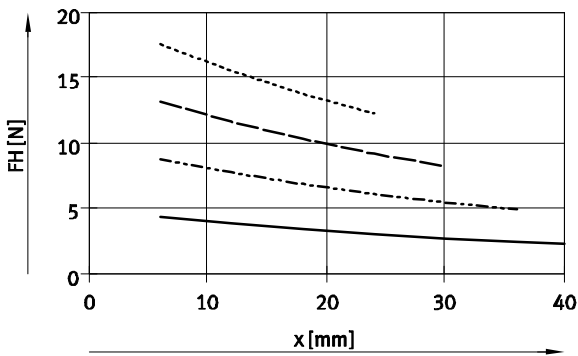


DHPS-10

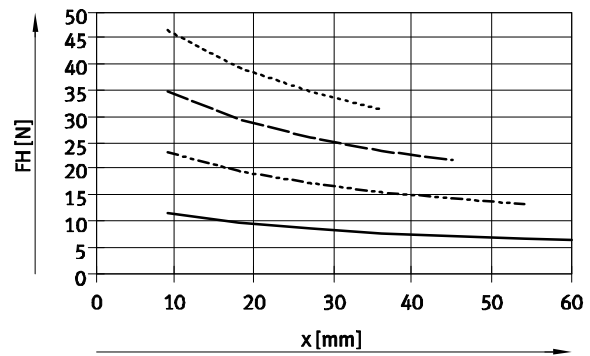


DHPS-16

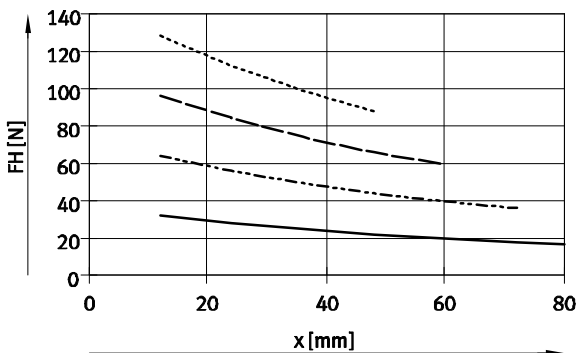


DHPS-20

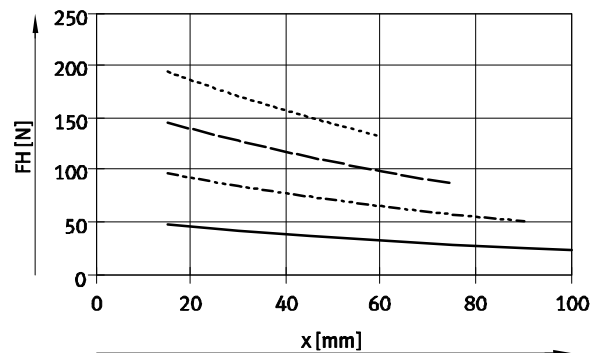

DHPS-25

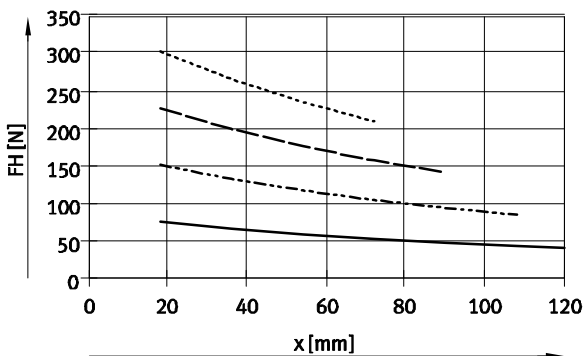

DHPS-35

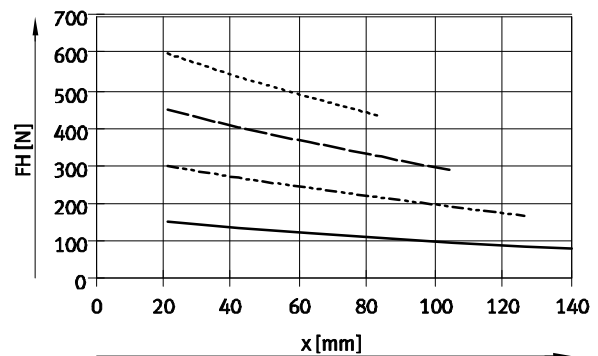


Parallel grippers DHPS


Technical data

Gripping force F_H per gripper jaw as a function of operating pressure and lever arm x

The gripping forces as a function of operating pressure and lever arm can be determined from the following graphs.

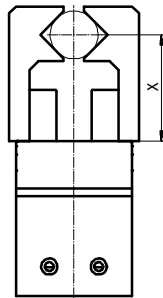


Note
Gripper selection
sizing software
→ www.festo.com




Internal gripping (opening)


DHPS-6

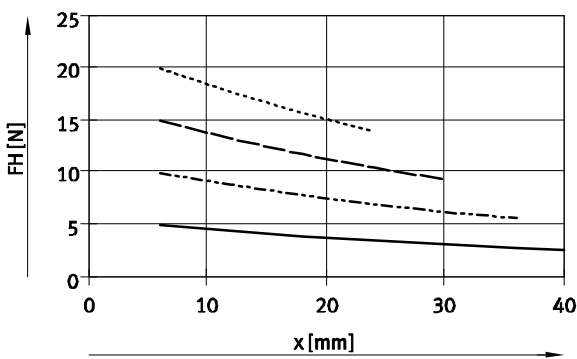


DHPS-10

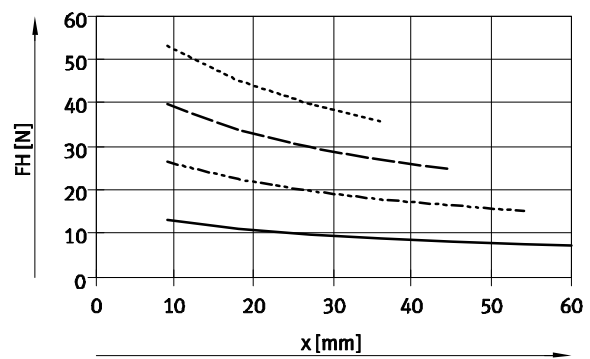


DHPS-16

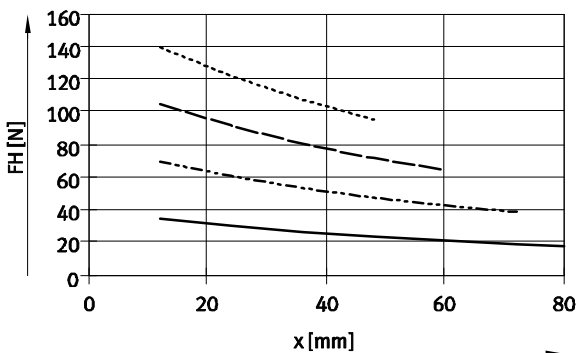


DHPS-20

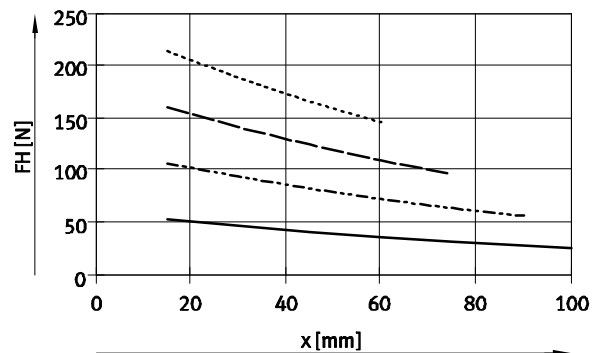

DHPS-25

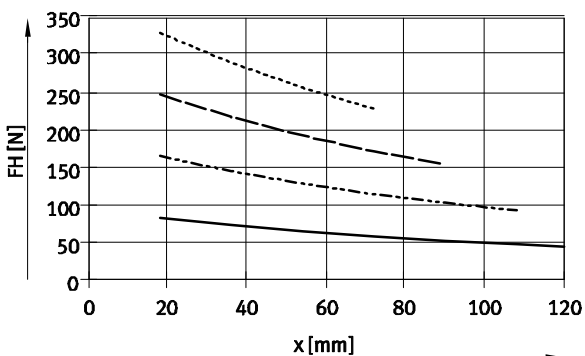

DHPS-35

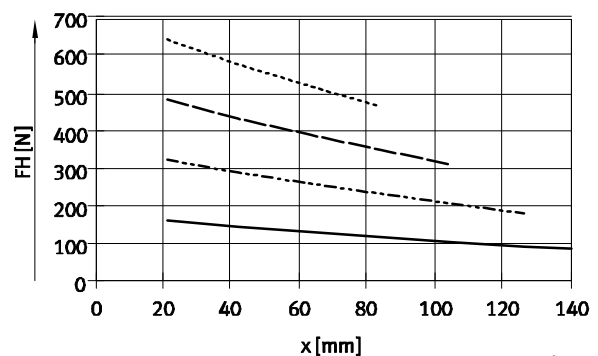

Parallel grippers DHPS


Technical data

Gripping force F_H per gripper jaw at 6 bar as a function of lever arm x and eccentricity a and b

The following formula must be used to calculate the lever arm x with eccentric gripping:

$$x = \sqrt{a^2 + b^2}$$

The gripping force F_H can be read from the graphs (→ page 10/11) using the calculated value x .

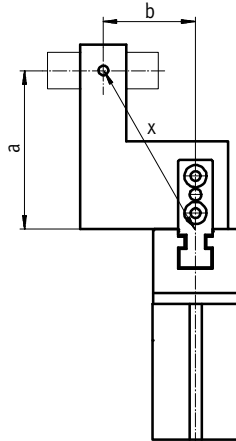

Calculation example

Given:

Distance $a = 25$ mm

Distance $b = 20$ mm

To be calculated:

The gripping force at 6 bar,
with a DHPS-16,
used as an external gripper


Procedure:

Calculating the lever arm x

$$x = \sqrt{25^2 + 20^2}$$

$$x = 32$$
 mm

The graph (→ page 10) gives a value of $F_H = 79$ N for the gripping force.

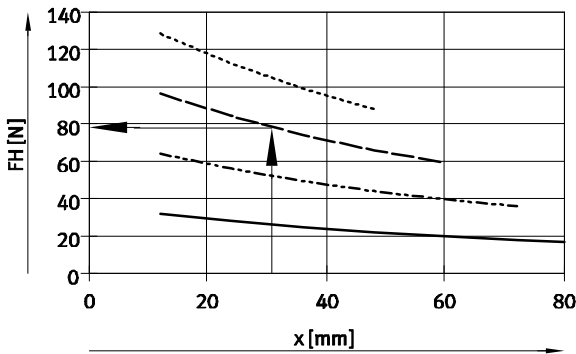



Parallel grippers DHPS

Technical data

Spring force F_F as a function of size and total gripper jaw stroke l

Gripping force retention for DHPS-...-N...

The spring forces F_F as a function of gripper jaw stroke l can be determined from the following graph.

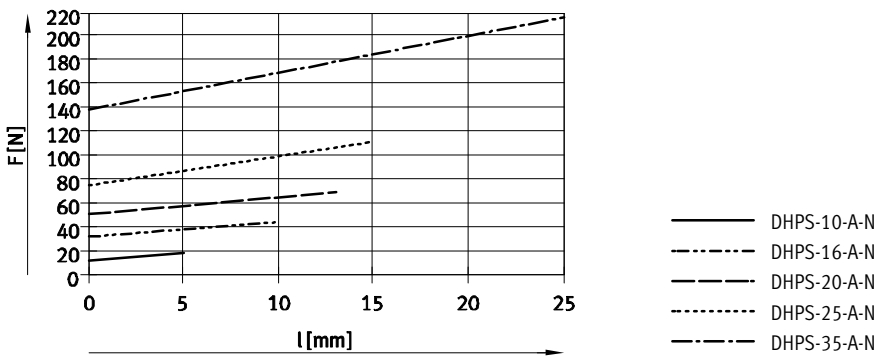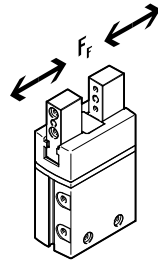

Spring force F_F as a function of size, gripper jaw stroke l and lever arm x per gripper finger

The lever arm x must be taken into consideration when determining the actual spring force F_{Ftotal} . The formulae for calculating the spring force are provided in the table below.

Gripping force retention	Size	F_{Ftotal} per gripper finger
NO, NC	10	$-0.02 * x + 0.5 * F_F$
	16	$-0.08 * x + 0.5 * F_F$
	20	$-0.1 * x + 0.5 * F_F$
	25	$-0.12 * x + 0.5 * F_F$
	35	$-0.19 * x + 0.5 * F_F$

Determination of the actual gripping forces F_{Gr} for DHPS-...-NO and DHPS-...-NC as a function of application

The parallel grippers with integrated spring type DHPS-...-NO (opening gripping force retention) and DHPS-...-NC (closing gripping force retention) can be used as

- single-acting grippers

- grippers with supplementary gripping force and
- grippers with gripping force retention depending on requirements.

In order to calculate the available gripping forces F_{Gr} (per gripper jaw),

the gripping force (F_H) and spring force (F_{Ftotal}) must be combined accordingly.

Application

Single-acting

Supplementary gripping force

Gripping force retention

- Gripping with spring force:
 $F_{Gr} = F_{Ftotal}$

- Gripping with pressure and spring force:
 $F_{Gr} = F_H + F_{Ftotal}$

- Gripping with spring force:
 $F_{Gr} = F_{Ftotal}$

- Gripping with pressure force:
 $F_{Gr} = F_H - F_{Ftotal}$


Parallel grippers DHPS

Technical data

FESTO

Dimensions

Download CAD data → www.festo.com

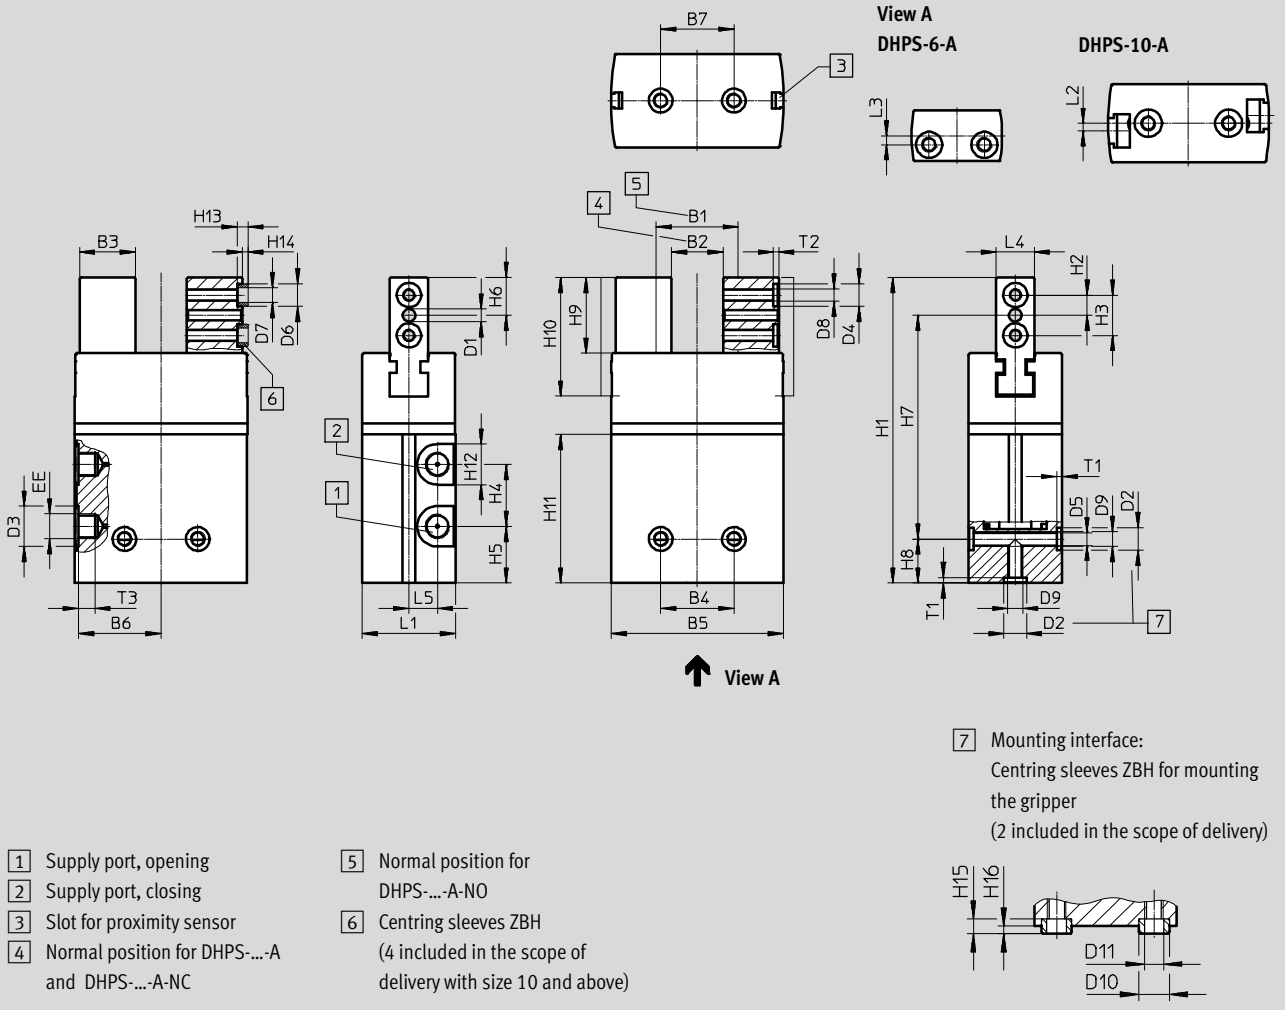

Size	B1	B2	B3	B4 ¹⁾	B5	B6	B7 ¹⁾	D1	D2	D3	D4
[mm]	±0.5	±0.5	-0.03		±0.1			∅ H8	∅ H8	∅	∅ H8
6	10	6	5.5	11	18	8.65	11	1.5	5	7	-
10	21.8	15.8	7	16	32	15.4	16	2	5	7	5
16	27.8	17.8	13	25	47	22.65	25	3	7	7	7
20	30	17	17.5	25	55.6	26.65	25	4	7	10	7
25	35.4	20.4	22	29	68.2	32.65	29	4	9	16	9
35	56	31	27	33	88	42.25	33	5	12	16	9

1) Tolerance for centring hole ±0.02 mm; tolerance for thread ±0.1 mm

Parallel grippers DHPS

Technical data

Size [mm]	D5 ∅ +0.1	D6 ∅ h7	D7 ∅	D8	D9	D10 ∅ h7	D11 ∅	EE	H1	H2	H3 ¹⁾
6	2.5	–	–	M2	M3	–	–	M3	45.5	2.9	5.8
10	2.5	5	3.2	M3	M3	5	3.2	M3	66	4	8
16	3.3	7	5.3	M4	M4	5	3.2	M3	80	5.5	11
20	3.3	7	5.3	M4	M4	7	5.3	M5	101	7	14
25	5.1	9	6.4	M5	M6	9	6.4	G1/8	121	8	16
35	6.4	9	6.4	M6	M8	12	10.3	G1/8	142	8.5	17

Size [mm]	H4	H5	H6	H7 ±0.2	H8 ²⁾	H9	H10	H11	H12	H13 –0.2	H14 –0.3
6	15	4	5	33	7.5	9.55	15.8	25.3	7	–	–
10	15.5	10.5	7.5	51	7.5	15.2	23	35	7	2.4	1.2
16	18	11	10	62.5	7.5	20	32.5	38.1	7	3	1.4
20	23	16	12.5	81	7.5	25	39.5	50	10	3	1.4
25	24.5	22.5	15	88.5	17.5	30	47	58.8	16	4	1.9
35	29	24	16	108.5	17.5	32	53	65.3	16	4	1.9

Size [mm]	H15 –0.2	H16 –0.3	L1	L2	L3 ¹⁾	L4 –0.05	L5	T1 +0.1	T2 +0.1	T3 +0.5
6	–	–	10 ^{+0.1}	–	1.8	5	1.5	1.2	–	3.5
10	2.4	1.2	15.5 ^{+0.1}	1.5	–	7	5	1.2	1.2	5
16	3	1.4	22 ^{+0.1}	–	–	10	7	1.6	1.6	6
20	3	1.4	30±0.1	–	–	12	9	1.6	1.6	6
25	4	1.9	37±0.1	–	–	15	11.3	2.1	2.1	6.5
35	4	1.9	45 ^{+0.1}	–	–	20	13.5	2.6	2.1	6.5

1) Tolerance for centring hole ±0.02 mm; tolerance for thread ±0.1 mm

2) Tolerance for centring hole –0.05 mm; tolerance for thread ±0.1 mm

Ordering data										
Size [mm]	Double-acting without compression spring		Single-acting or with gripping force retention							
	Part No.	Type	Opening		Closing					
	Part No.	Type	Part No.	Type	Part No.	Type				
6	1254039	DHPS-6-A	–	–	–	–				
10	1254040	DHPS-10-A	1254041	DHPS-10-A-NO	1254042	DHPS-10-A-NC				
16	1254043	DHPS-16-A	1254044	DHPS-16-A-NO	1254045	DHPS-16-A-NC				
20	1254046	DHPS-20-A	1254047	DHPS-20-A-NO	1254048	DHPS-20-A-NC				
25	1254049	DHPS-25-A	1254050	DHPS-25-A-NO	1254051	DHPS-25-A-NC				
35	1254052	DHPS-35-A	1254053	DHPS-35-A-NO	1254054	DHPS-35-A-NC				


Parallel grippers DHPS






Accessories



Adapter kit
HAPG, HAPS, HMSV

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

 Note
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit						Download CAD data → www.festo.com	
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit		
					CRC ¹⁾	Part No.	Type
DGSL/DHPS	DGSL	DHPS			HMSV		
	4, 6	6	■	■	2	548783	HMSV-53
	8, 10	10	■	■		548784	HMSV-54
	12, 16	16	■	■		548785	HMSV-55
	20, 25	20, 25	■	■		548786	HMSV-56
SLT/DHPS	SLT	DHPS			HAPS		
	6	6	■	–	2	178447	HAPS-1
	16	10	■	–		178449	HAPS-3
	20	16, 20	■	–		178450	HAPS-4
	25	25	■	–		178451	HAPS-5
DPZ/DHPS	DPZ	DHPS			HAPG		
	10, 16	10	■	–	2	163250	HAPG-1
	16	16, 20	■	–		163251	HAPG-2
	20	16, 20	■	–		163252	HAPG-3
	25, 32	25	■	–		163253	HAPG-4

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


Parallel grippers DHPS




Accessories

FESTO

Adapter kit
HAPG, HMSV, HMVA

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

 Note
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit		
					CRC ¹⁾	Part No.	Type
DGPL, DGE-..., DGEA/DHPS	DG...	DHPS				HMVA, HAPG, HMSV	
	Direct mounting						
	18 ²⁾ , 25, 32 ³⁾	6	<input type="checkbox"/>	<input type="checkbox"/>	2	196788	HMVA-DLA18/25
			<input type="checkbox"/>	<input type="checkbox"/>		192706	HAPG-37-S1
	40	6	<input type="checkbox"/>	<input type="checkbox"/>		196790	HMVA-DLA40
			<input type="checkbox"/>	<input type="checkbox"/>		192706	HAPG-37-S1
	18 ²⁾ , 25, 32 ³⁾	10	<input type="checkbox"/>	<input type="checkbox"/>		196788	HMVA-DLA18/25
			<input type="checkbox"/>	<input type="checkbox"/>		192705	HAPG-36-S1
	40	10	<input type="checkbox"/>	<input type="checkbox"/>		196790	HMVA-DLA40
			<input type="checkbox"/>	<input type="checkbox"/>		192705	HAPG-36-S1
	18 ²⁾ , 25, 32 ³⁾	16	<input type="checkbox"/>	<input type="checkbox"/>		196788	HMVA-DLA18/25
			<input type="checkbox"/>	<input type="checkbox"/>		193922	HAPG-37-S4
	40	16	<input type="checkbox"/>	<input type="checkbox"/>		196790	HMVA-DLA40
			<input type="checkbox"/>	<input type="checkbox"/>		193922	HAPG-37-S4
	Dovetail mounting						
	18 ²⁾ , 25	10	<input type="checkbox"/>	<input type="checkbox"/>	2	196788	HMVA-DLA18/25
			<input type="checkbox"/>	<input type="checkbox"/>		177767	HMSV-27
	32 ³⁾	10	<input type="checkbox"/>	<input type="checkbox"/>		196789	HMVA-DL32
			<input type="checkbox"/>	<input type="checkbox"/>		177767	HMSV-27
	40	10	<input type="checkbox"/>	<input type="checkbox"/>		196790	HMVA-DLA40
			<input type="checkbox"/>	<input type="checkbox"/>		177767	HMSV-27
18 ²⁾ , 25	16	<input type="checkbox"/>	<input type="checkbox"/>	196788		HMVA-DLA18/25	
		<input type="checkbox"/>	<input type="checkbox"/>	177768		HMSV-28	
32 ³⁾	16	<input type="checkbox"/>	<input type="checkbox"/>	196789		HMVA-DL32	
		<input type="checkbox"/>	<input type="checkbox"/>	177768		HMSV-28	
40	16	<input type="checkbox"/>	<input type="checkbox"/>	196790		HMVA-DLA40	
		<input type="checkbox"/>	<input type="checkbox"/>	177768		HMSV-28	
32 ³⁾	25	<input type="checkbox"/>	<input type="checkbox"/>	196790		HMVA-DL32	
		<input type="checkbox"/>	<input type="checkbox"/>	177769		HMSV-29	
40	25	<input type="checkbox"/>	<input type="checkbox"/>	196790		HMVA-DLA40	
		<input type="checkbox"/>	<input type="checkbox"/>	177769		HMSV-29	
40	35	<input type="checkbox"/>	<input type="checkbox"/>	196790	HMVA-DLA40		
		<input type="checkbox"/>	<input type="checkbox"/>	177770	HMSV-30		

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

2) Only for DGEA-...

3) Only for DGPL

Parallel grippers DHPS

Accessories



Adapter kit
DHAA, HAPG

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

Note
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit						Download CAD data → www.festo.com	
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit		
					CRC ¹⁾	Part No. Type	
DRRD/DHPS	DRRD	DHPS			DHAA		
	8	6	■	■	2	2808892	DHAA-G-Q11-8-B1-6
	10	6	■	■		2807644	DHAA-G-Q11-10-B1-6
	12	6	■	■		2805783	DHAA-G-Q11-12-B1-6
	12	10	■	■		2802687	DHAA-G-Q11-12-B1-10
	16	10	■	■		2190504	DHAA-G-Q11-16-B1-10
	16	16	■	■		2190393	DHAA-G-Q11-16-B1-16
	16	20	■	■		2187838	DHAA-G-Q11-16-B1-20
	20	16	■	■		2190284	DHAA-G-Q11-20-B1-16
	20	20	■	■		2187713	DHAA-G-Q11-20-B1-20
	20	25	■	■		2185820	DHAA-G-Q11-20-B1-25
	25	16	■	■		1471634	DHAA-G-Q11-25-B1-16
	25	20	■	■		1722652	DHAA-G-Q11-25-B1-20
	25	25	■	■		1725707	DHAA-G-Q11-25-B1-25
	32	25	■	■		2186909	DHAA-G-Q11-32-B1-25
	32	35	■	■		2187316	DHAA-G-Q11-32-B1-35
35, 40	35	■	■	2187606	DHAA-G-Q11-35/40-B1-35		
HSP/DHPS	HSP	DHPS			HAPG		
	12	6	■	-	2	192709	HAPG-60-S1
	16	6	■	-		540881	HAPG-70-B
		10	■	-		192706	HAPG-37-S1
	25	10	■	-		540882	HAPG-71-B
		16	■	-		192705	HAPG-36-S1
	25	16	■	-		540882	HAPG-71-B
				192705	HAPG-36-S1		
				540883	HAPG-72-B		
				193922	HAPG-37-S4		
				540883	HAPG-72-B		
HSW/DHPS	HSW	DHPS			HAPG		
	12, 16	6	■	-	2	192706	HAPG-37-S1
		10	■	-		540882	HAPG-71-B
	12, 16	10	■	-		192705	HAPG-36-S1
						540882	HAPG-71-B

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


Parallel grippers DHPS






Accessories

FESTO

Adapter kit
HAPG

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

 Note
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit		
					CRC ¹⁾	Part No.	Type
	DSM:....-FW	DHPS			HAPG		
	6, 8, 10	6	■	■	2	187568	HAPG-34
	DSM:....	DHPS			HAPG		
	12	10	■	■	2	163266	HAPG-17
	16	10	■	■		163267	HAPG-18
	16	16, 20	■	■		163268	HAPG-19
	25	16, 20	■	■		163269	HAPG-20
25	25	■	■	163270		HAPG-21	
32	25	■	■	163271	HAPG-22		
	DSM:....-HD	DHPS			DHAA		
	12	6	■	■	2	8071899	DHAA-G-R3-12-B18-6
	12	10	■	■		8072157	DHAA-G-R3-12-B18-10
	16	10	■	■		8071917	DHAA-G-R3-16-B18-10
	16	16	■	■		8079173	DHAA-G-R3-16-B18-16
	25	16, 20	■	■		8071956	DHAA-G-R3-25-B18-16
32	25	■	■	8079208		DHAA-G-R3-32-B18-25	
	DSL	DHPS			HAPG		
	16	10	■	■	2	163266	HAPG-17
	20	10	■	■		163267	HAPG-18
	20	16, 20	■	■		163268	HAPG-19
	25	16, 20	■	■		163269	HAPG-20
	25	25	■	■		163270	HAPG-21
32	25	■	■	163271		HAPG-22	

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


Parallel grippers DHPS







Accessories



Adapter kit
DHAA, HAPG, HMSV

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

 Note
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit						Download CAD data → www.festo.com	
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit		
					CRC ¹⁾	Part No.	Type
EGSL/DHPS	EGSL	DHPS			HMSV		
	35	6	■	■	2	548783	HMSV-53
	35	10	■	■		1088262	HMSV-70
			■	■		548784	HMSV-54
	45, 55	16	■	■		1088262	HMSV-70
75	20, 25	■	■	548785	HMSV-55		
					548786	HMSV-56	
ERMB/DHPS	ERMB	DHPS			HAPG		
	20	16, 20	■	■	2	184479	HAPG-SD2-3
	25	16, 20	■	■		184482	HAPG-SD2-6
	20	25	■	■		184480	HAPG-SD2-4
	25	25	■	■		184483	HAPG-SD2-7
	32	25	■	■		184485	HAPG-SD2-9
	32	35	■	■		184486	HAPG-SD2-10
ERMO/DHPS	ERMO	DHPS			DHAA		
	12	6	■	■	2	8071899	DHAA-G-R3-12-B18-6
	12	10	■	■		8072157	DHAA-G-R3-12-B18-10
	16	10	■	■		8071917	DHAA-G-R3-16-B18-10
	16	16	■	■		8079173	DHAA-G-R3-16-B18-16
	25	16, 20	■	■		8071956	DHAA-G-R3-25-B18-16
	32	25	■	■		8079208	DHAA-G-R3-32-B18-25
EHMB/DHPS	EHMB	DHPS			HAPG		
	20	25	■	■	2	184485	HAPG-SD2-9
	20	35	■	■		184486	HAPG-SD2-10
	25, 32	35	■	■		526027	HAPG-SD2-21

Parallel grippers DHPS



Accessories

Sensor rail HGP-SL

can be glued into place

Material:

Wrought aluminium alloy

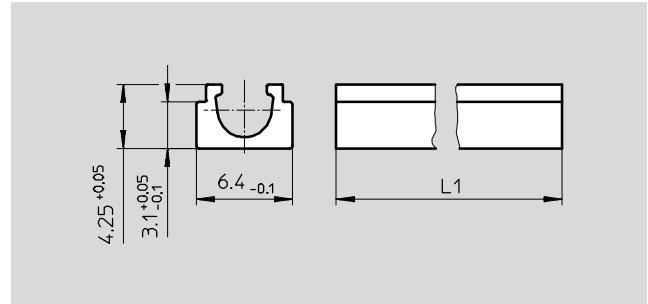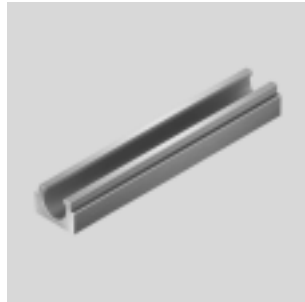

Dimensions and ordering data				
For size [mm]	L1	Weight [g]	Part No.	Type
10	35	1.4	535582	HGP-SL-10-10
16	38	1.5	535583	HGP-SL-10-16
20	50	2.0	535584	HGP-SL-10-20
25	58	2.3	535585	HGP-SL-10-25
35	65	2.6	535586	HGP-SL-10-35


Ordering data						
	For size [mm]	Description	Weight [g]	Part No.	Type	PU ¹⁾
Centring sleeve ZBH				Technical data → Internet: zbh		
	10	For centring the gripper fingers on the gripper jaws	1	189652	ZBH-5	10
	16, 20		1	186717	ZBH-7	
	25, 35		1	150927	ZBH-9	
	6, 10	For centring the gripper when mounting	1	189652	ZBH-5	
	16, 20		1	186717	ZBH-7	
	25		1	150927	ZBH-9	
	35		1	189653	ZBH-12	

1) Packaging unit

Parallel grippers DHPS


Accessories

FESTO

Ordering data				
Type	For size	Weight [g]	Part No.	Type
Position sensor SMH-S1			Technical data → Internet: smh-s1	
	6	20	175710	SMH-S1-HGP06


Installation instructions for position sensor SMH-S1

To guarantee the functionality of the position sensor, the outlet for the cable and the compressed air tubing must be facing the same direction during installation.






Signal converter SVE4 for position sensor SMH-S1

- Converts analogue signals into switching points
- Switching function freely programmable with teach-in
- Threshold value, hysteresis or window comparator

Ordering data						
Type	For size	Input connection	Output connection	Switching output	Weight [g]	Part No. Type
Signal converter SVE4		Technical data → Internet: sve4				
	6	Socket M8x1, 4-pin	Plug M8x1, 4-pin	2x PNP	19	544216 SVE4-HS-R-HM8-2P-M8
				2x NPN		544219 SVE4-HS-R-HM8-2N-M8

Ordering data – Connecting cables


Ordering data – Connecting cables				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
Connection between position sensor and signal converter					
	Straight socket, M8x1, 4-pin	Straight plug, M8x1, 4-pin	2.5	554035	NEBU-M8G4-K-2.5-M8G4
Connection between signal converter and controller					
	Straight socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541342	NEBU-M8G4-K-2.5-LE4
			5	541343	NEBU-M8G4-K-5-LE4
	Angled socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541344	NEBU-M8W4-K-2.5-LE4
			5	541345	NEBU-M8W4-K-5-LE4

Parallel grippers DHPS


Accessories

FESTO



Proximity sensor for size 10 ... 35

Ordering data – Proximity sensors for T-slot, magneto-resistive						Technical data → Internet: smt	
	Type of mounting	Electrical connection, connection direction	Switching output	Cable length [m]	Part No.	Type	
N/O contact							
	Insertable in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547859	SMT-8G-PS-24V-E-2,5Q-OE	
		Plug M8x1, 3-pin, lateral		0.3	547860	SMT-8G-PS-24V-E-0,3Q-M8D	
		Cable, 3-wire, lateral	NPN	2.5	8065028	SMT-8G-NS-24V-E-2,5Q-OE	
		Plug M8x1, 3-pin, lateral		0.3	8065027	SMT-8G-NS-24V-E-0,3Q-M8D	

Proximity sensor for size 10 ... 35, with sensor rail HGP-SL10-...

Ordering data – Proximity sensors for C-slot, magneto-resistive						Technical data → Internet: smt	
	Type of mounting	Electrical connection, connection direction	Switching output	Cable length [m]	Part No.	Type	
N/O contact							
	Insertable in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547862	SMT-10G-PS-24V-E-2,5Q-OE	
		Plug M8x1, 3-pin, lateral		0.3	547863	SMT-10G-PS-24V-E-0,3Q-M8D	
		Cable, 3-wire, lateral	NPN	2.5	8065030	SMT-10G-NS-24V-E-2,5Q-OE	
		Plug M8x1, 3-pin, lateral		0.3	8065029	SMT-10G-NS-24V-E-0,3Q-M8D	


Ordering data – Connecting cables

Ordering data – Connecting cables					Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type	
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3	
			5	541334	NEBU-M8G3-K-5-LE3	
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3	
			5	541341	NEBU-M8W3-K-5-LE3	



Position transmitter

The position transmitter continuously senses the position of the piston.
It has an analogue output with an output signal in proportion to the piston position.

Ordering data – Position transmitters for T-slot

Ordering data – Position transmitters for T-slot							Technical data → Internet: position transmitter		
	For size	Position measuring range	Analogue output		Type of mounting	Electrical connection	Cable length [m]	Part No.	Type
			[V]	[mA]					
	10 ... 35	0 ... 40	0 ... 10	–	Insertable in slot from above	Plug M8x1, 4-pin, in-line	0.3	553744	SMAT-8M-U-E-0,3-M8D
	35	0 ... 50	–	4 ... 20					

Ordering data – Connecting cables

Ordering data – Connecting cables					Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type	
	Straight socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541342	NEBU-M8G4-K-2.5-LE4	
			5	541343	NEBU-M8G4-K-5-LE4	
	Angled socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541344	NEBU-M8W4-K-2.5-LE4	
			5	541345	NEBU-M8W4-K-5-LE4	